


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
  - Metal silicon junction ,majority carrier conduction
  - Guard ring for overvoltage protection
  - Low power loss ,high efficiency
  - High current capability ,low forward voltage drop
  - High surge capability
  - Very low profile -typical height of 1.1mm
  - Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals  
Component in accordance to RoHS 2015/863/EU



### TO-277

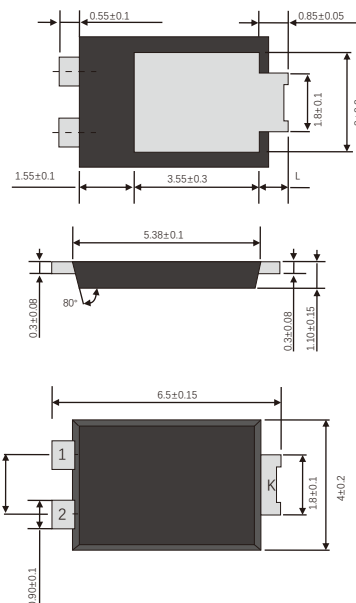


### MECHANICAL DATA

- Case: TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Mounting Position: Any
- Weight: 0.092 grams (approx)

### TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications



Dimensions in inches and (millimeters)

### MAXIMUM RATINGS

(Ratings at 25 °C ambient temperature unless otherwise specified )

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	60	V
Maximum average forward rectified current	$I_{F(AV)}$	20.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	$I_{FSM}$	200	A
Operating junction temperature range	$T_j$	-55 to+150	°C
Storage temperature range	$T_{stg}$	-55 to+150	°C

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	I <sub>F</sub> =20.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.55	0.60	V
		T <sub>A</sub> =100°C		0.51	-	
		T <sub>A</sub> =125°C		0.49	-	
	I <sub>F</sub> =5.0A	T <sub>A</sub> =25°C		0.41	-	
		T <sub>A</sub> =100°C		0.33	-	
		T <sub>A</sub> =125°C		0.30	-	
Reverse current	V <sub>R</sub> =60V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	-	150	μA
		T <sub>A</sub> =100°C		-	10	mA
		T <sub>A</sub> =125°C		-	30	
Typical junction capacitance	4V,1MHz		C <sub>J</sub>	2000		pF

Notes: 1.Pulse test: 300μs pulse width,1% duty cycle

2.Pulse test: pulse width ≤40ms

## THERMAL CHARACTERISTICS

Parameter	Symbol	TO-277	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJA</sub>	60.0	°C/W
	R <sub>θL</sub>	3.0	

3 Units mounted on recommended PCB 1 oz. Pad layout

## AVAILABLE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size L*W*H(mm )	Quantity (reel/box)	Carton Size L*W*H(mm )	Quantity (box/carton)
SP20U60L-TO-277	T/R	φ300	5000	338*338*40	2	365*365*360	7

FIG.1-FORWARD CURRENT DERATING CURVE

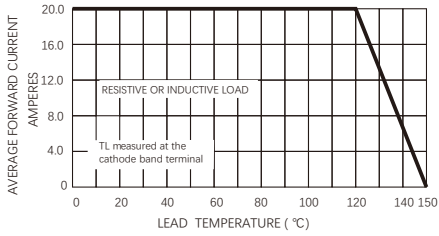


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

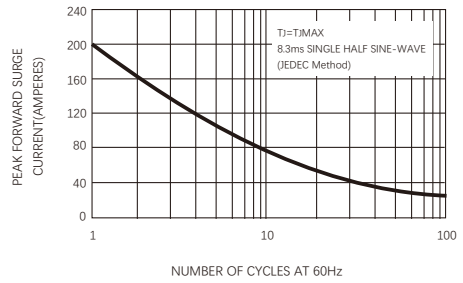


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

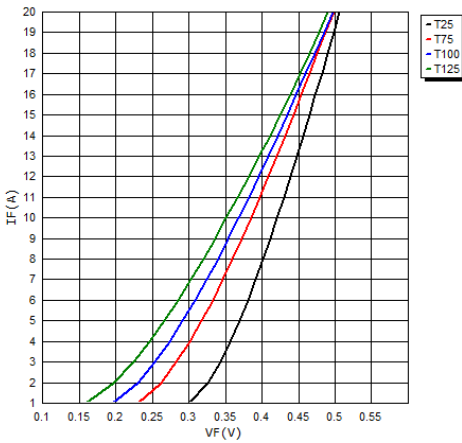


FIG.4-TYPICAL REVERSE CHARACTERISTICS


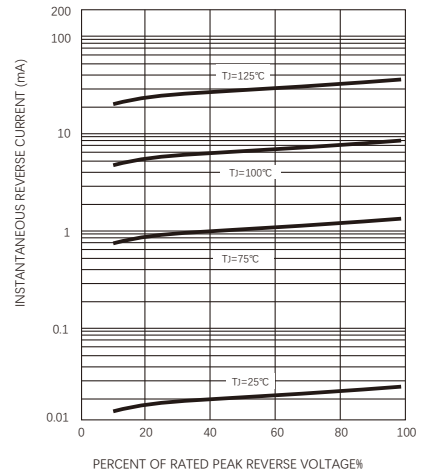


FIG.5-TYPICAL JUNCTION CAPACITANCE

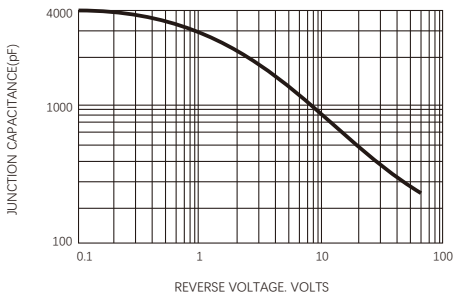

## Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.